

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 655 853 A2

(12)

EUROPEAN PATENT APPLICATION(21) Application number: **94118496.2**(51) Int. Cl.⁶: **H04N 1/00, H04N 1/387**(22) Date of filing: **24.11.94**

(30) Priority: **30.11.93 JP 299651/93**
01.12.93 JP 301556/93

(43) Date of publication of application:
31.05.95 Bulletin 95/22

(84) Designated Contracting States:
DE FR GB IT

(71) Applicant: **MITA INDUSTRIAL CO. LTD.**
2-28, 1-chome, Tamatsukuri
Chuo-ku
Osaka-shi
Osaka 540 (JP)


(72) Inventor: **Miyazaki, Tadashi, c/o Mita Industrial Co., Ltd.**
2-28, Tamatsukuri 1-chome,
Chuo-ku
Osaka-shi,
Osaka 540 (JP)
Inventor: **Kumamoto, Hidechika, c/o Mita Industrial Co., Ltd.**
2-28, Tamatsukuri 1-chome,
Chuo-ku
Osaka-shi,
Osaka 540 (JP)

(74) Representative: **Patentanwälte Beetz - Timpe - Siegfried Schmitt-Fumian - Mayr**
Steinsdorfstrasse 10
D-80538 München (DE)

(54) **Image processing circuit.**

(57) An image processing circuit (16) which adds, by means of a yellow color image data, forgery tracing information to yellow, magenta and cyan color image data obtained by reading out of an original (12). A tracing information adder replaces the read-out yellow color image data with a yellow color image of a higher density in a low-density area where the density of the read-out yellow color image data is equal to or below a set threshold value (30). In a high-density area where the density of the read-out yellow color image data exceeds the set threshold value (30), the tracing information is added by adding a predetermined value B to the read-out yellow color image data.

Fig.1

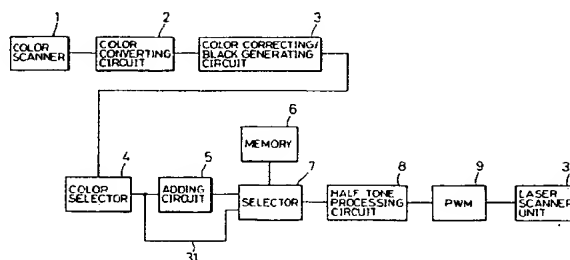**EP 0 655 853 A2****BEST AVAILABLE COPY**

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an image processing circuit for use in a digital full-color electrographic copying machine having a forgery preventing function.

Description of the Prior Art

In recent years, digital color electrographic copying machines have been spreading, and most of them are used for beneficial purposes. However, since anyone can easily obtain a copy with a high resolution and an excellent color reproducibility because of the improvement in performance of such copying machines, the forgery of bank notes, which is a serious crime, may easily be committed.

For this reason, manufactures of copying machines of this type enables tracing with respect to a copy (i.e. the tracing of the copying machine with which the original is copied and of the date of the copying) in order to prevent to the utmost the forgery of bank notes which is a crime exerting a great influence on society. Specifically, when an original is copied, tracing information such as the machine number of the copying machine and the date of the copying are added to the copy of the original. In order that the image other than the added information is not damaged due to the addition of such tracing information, it is necessary to add the information at a density where the information cannot visually be recognized. For this reason, a tracing information adding method is employed using a yellow color image data which is difficult to visually recognize.

In such a tracing information adding method, when tracing information is added by adding a yellow color image data of a predetermined density (this density should be as low as possible so that visual recognition is impossible), for example at a low density portion (white portion) where there is hardly any yellow color image data, the density of the added tracing information is too low, so that it may be impossible to read out the information from forged bank notes by a color scanner. Therefore, a way to solve this problem is desired.

In the above-described method of adding tracing information, in order to further decrease the influence on the reproduced image by the addition of the tracing information, it is desired that the tracing information is added uniformly to the entire image. In this case, the ratio of the area of the added tracing information to the area of the reproduced image is necessarily fixed. That is, the ratio of the area of the tracing information to the area of the reproduced image is necessarily fixed even if

the contents of the tracing information are changed, for example, even if the copy date is changed every day.

Further, it is desirable that the tracing information added in this manner should be easily and surely detected by anyone that has no special skills so that the tracing of the copy may be made rapidly at the sites where criminal cases occur.

SUMMARY OF THE INVENTION

An object of the present invention is to provide an image processing circuit which adds tracing information in a manner such that the deterioration in output image due to the addition of the information is minimized and that the added information is read out by a color scanner without a failure.

Another object of the present invention is to provide an image processing circuit where the added tracing information is easily sensed.

An image processing circuit of the present invention is provided with an information adding means for adding forgery tracing information data to a color image data and a means for increasing the density of the added information data in a low-density area where the density of the color image data is equal to or below a predetermined value. The information adding means adds the tracing information in a form of an $m \times n$ matrix by adding a yellow color image data and specifies the contents of the tracing information based on a position within the $m \times n$ matrix where the yellow color image data is added.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects and features of this invention will become clear from the following description, taken in conjunction with the preferred embodiments with reference to the accompanied drawings in which:

Fig. 1 is a block circuit diagram showing an image processing circuit embodying the present invention;

Fig. 2 is a view of assistance for explaining the addition of density by an adding circuit of the circuit of Fig. 1;

Fig. 3 shows an example where the addition of the information is performed in a matrix in the circuit of Fig. 1;

Fig. 4 shows another example where the addition of the information is performed in a matrix in the circuit of Fig. 1;

Fig. 5 a detail view of information when the addition of information is performed in a matrix in the circuit of Fig. 1;

Fig. 6 shows an example of a yellow color image data output from a selector in the main

scanning direction in the circuit of Fig. 1;
 Fig. 7 shows an example of a yellow color image data output from the selector in the sub scanning direction in the circuit of Fig. 1;
 Fig. 8 shows an input image which is a bank note;
 Fig. 9 shows an output image of the input image of Fig. 8;
 Fig. 10 shows a characteristic example of a half tone processing circuit; and
 Fig. 11 schematically shows a digital full color electrographic copying machine on which the present invention is mounted.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to the drawings, an image processing circuit used in a digital full-color electrographic copying machine will hereinafter be described as an embodiment of the present invention. In this embodiment, the density of the yellow color image data added as the tracing information is higher in a yellow low density portion of the original than in a yellow high density portion thereof.

Specifically, as shown in Fig. 2, in the yellow high density portion of the original where the density of the yellow image data read-out from the original exceeds a set threshold value, the tracing information is added by adding a predetermined value (in this case, a value B which is as small as possible so that visual recognition is impossible) to the density of the read-out yellow image data. On the contrary, in the yellow low density portion of the original where the density of the yellow image data read-out from the original is equal to or lower than the set threshold value, the tracing information is added by replacing the read-out yellow color image data with a yellow color image data of a predetermined value (in this case, a value A which is higher than the value B so that it can be read out by a scanner).

By this method, the tracing information added to any density portion of the copy can be read-out by a color scanner without a failure with a minimum deterioration in copy image quality due to the addition of the tracing information. Y_0 of Fig. 2 shows a relationship between yellow color image data input and output when an 8-bit yellow color image data (256 tones) read-out from an original is outputted without the addition of the density as the tracing information, and Y_1 shows a relationship between the output and input when the density is added as the tracing information. The threshold value is 30 tones.

Moreover, in this embodiment, tracing information is added in a manner such that the ratio of the area of the tracing information to the area of the

reproduced image is fixed irrespective of the contents of the tracing information and that, together with the tracing information, position information is added for indicating the position on the reproduced image where the tracing information is added.

For this purpose, the tracing information by means of yellow image data is added in the form of $m \times n$ matrix as shown in Fig. 3, and the contents of the tracing information are changed based on the position within the matrix where the yellow color image data is added. In the figure, "0" represents positions where the yellow image data is not added, and "1" represents positions where the yellow image data is added. The yellow image data is added to only one cell in each row. For example, when only a machine number of n figures is added as the tracing information, the first row is the highest figure and the n th row is the lowest figure.

In Fig. 4, the addition of the position information by means of yellow color image data is made while all the cells in the 0th row and 0th column located along the periphery of the $m \times n$ matrix is "1". In this case, tracing information having $m-1$ columns from 1 to m and $n-1$ rows from 1 to n is formed and added. Thus, by adding position information to a column or a row along the periphery of the matrix or to both of the row and the column, the position of the tracing information on the reproduced image is easily detected at the time of tracing.

Referring to Fig. 1, there is shown an image processing circuit employing the above-described adding method. Reference numeral 1 is a color scanner which outputs color image data in the form of the three primary colors of light (red (R), green (G) and blue (B)) by reading-out color image data of a color original to be copied. Reference numeral 2 is a color converting circuit which converts color image data in the form of the three primary colors of light outputted from the color scanner 1 into color image data of three colors of yellow, magenta and cyan representative of toner density.

Reference numeral 3 is a color correcting/black generating circuit which color-corrects (for example, corrects the colors to fit the characteristics of the human eye) the 8-bit yellow, magenta and cyan color image data (256 tones) outputted from the color converting circuit 2 and that generates black color image data. Reference numeral 4 is a color selector which successively outputs the data of the four color components of yellow, magenta, cyan and black from the color correcting/black generating circuit 3 obtained by reading out a color original. In the copying machine of Fig. 11, since an image of each color is superposed one on another to form a color image on a sheet, colors are selected one by one by the color selector 4.

Reference numeral 5 is an adding circuit which adds a density (tone) as the tracing information as shown in Fig. 2 when a yellow component of the color image data of yellow is supplied from the color selector 4. In this case, in the yellow low density portion where the value of the yellow color image data is equal to or lower than 30 tones, the read-out yellow color image data is replaced by a yellow color image data of A tones which can be read out by a color scanner, and in the high yellow density portion where the value of the yellow color image data read out from the original exceeds 30 tones, B tones which is as low as possible so that the image quality does not deteriorate is added to the value of the yellow color image data from the color selector 4.

Reference numeral 6 is a memory for storing a position data for specifying the position of density addition in order to add the density as the tracing and position information in the form of the matrix as shown in Fig. 4. To the yellow component of the color image data selected by the color selector 4, a density processing as shown in Fig. 2 is performed by the adding circuit 5 irrespective of the position to which the tracing information is added. In the memory 6, a position data is stored on a position to which the tracing information is added for a color image data as shown in Fig. 3, Fig. 4 or Fig. 5. To a selector 7, the yellow component data density-processed by the adding circuit 5 and a yellow component data (not density-processed) which bypasses the adding circuit 5 through a bypass 31 are inputted. Either of the output data of the adding circuit 5 and the data of the bypass 31 is selected depending on the data supplied from the memory 6, and the selected data is outputted. The output data of the adding circuit 5 is selected by the position data from the memory 6. While the magenta, cyan and black component data are being outputted from the color selector 4, the selector 7 outputs the data of the bypass 31.

Fig. 5 shows a 10×10-block (160×160-dot) matrix consisting of a 16×16 unit information block where tracing information 50 and position information 51 whose unit information sizes in the main and sub scanning direction are respectively two dots and four dots are added based on the position data from the memory 6 so that the minimum information addition pitches in the main and sub scanning directions are respectively (16÷2) dots and (16÷4) dots. From the selector 7, yellow color image data as shown in Figs. 6 and 7 are outputted at the positions of all the tracing and position information 50 and 51.

In actuality, the tracing information and the position information are repeatedly added at a predetermined pitch both in the main and sub scanning directions so that every 160×160-dot matrix, a

portion where no information is added is left along the periphery of the matrix. For example, when the input image is a bill, the tracing information and the position information are added to the entire surface of the output image in a matrix unit 90 of approximately 1cm×1cm. The matrix unit 90 corresponds to the entire of the matrix of Fig. 5.

In Figs. 6 and 7, the hatched portions represent the added density. In Fig. 5, the hatched portions represent the position of density addition at the unit information size (2×4 dots) within the matrix. To the column A of the matrix, position information is added which is used as a reference position in the main scanning direction for detecting tracing information. To the column B of the matrix, copy year information is added where B·1=1993, B·2=1994, ..., B·0=2002. To the column C of the matrix, copy month information is added where C·1=January, C·2=February, ..., C·0=October, C·1 and C·0=November, C·2 and C·0=December. To the columns D and E, copy day information is added where D·1 to D·0=the tenth digit of the day and E·1 to E·0=the unit digit of the day. To the columns F to J, machine number information is added represented by a decimal number of five digits where the highest digit is in the column F and the lowest digit is in the column J. In this figure, tracing information is added which shows that copying is made on November 5, 1993 with a copying machine of a machine number of 87654. The date of copying is automatically renewed by changing the position data from the memory 6 by a clock function.

In Fig. 1, reference numeral 8 is a half tone processing circuit which executes a tone processing for reproduction of half tone according to a multi-value dither method. Reference numeral 9 is a pulse width modulating circuit which converts one pixel into many values by varying a pulse width for controlling ON/OFF of a laser beam output according to an output from the half tone processing circuit 8. The pulse width modulation signal is supplied to a succeeding laser scanner unit 32.

Fig. 11 schematically shows a digital full-color electrographic copying machine provided with an image processing circuit for adding tracing information in the above-described manner. A color original 12 placed on a contact glass 10 while being pressed thereonto by an original cover 11 is scanned by a scanning optical system 13 constituting a color scanner portion. Image information of the original 12 is directed via a condenser lens 14 to a light receiving device 15 such as a charge coupled device (CCD), where the image information is converted into an electric signal. Then, at an image processing circuit portion 16, the addition of tracing information and a signal processing such as color conversion necessary for image processing

are performed with respect to the electric signal, and thereafter, a latent image is formed on a photoreceptor drum 18 by a laser scanner unit 17. Prior to this operation, the surface of the photoreceptor drum 18 is charged by a main charger 19.

To form a color image, a latent image is formed on the photoreceptor drum 18 by a laser beam output based on a pulse width modulation (PWM) signal of a yellow color image data with respect to which the addition of tracing information and the signal processing such as color conversion necessary for image processing have been performed. The latent image is developed by a Y developer unit 20. The Y developer unit 20 contains yellow toner and develops the latent image on the photoreceptor drum 18 with the yellow toner. The image on the photoreceptor drum 18 developed with the yellow toner is transferred onto a sheet of paper arranged to wind around the surface of a transfer drum 21. The sheet of paper is supplied from a paper feeding cassette 22 or 23 through a paper feeding path.

The sheet remains on the surface of the transfer drum 21, and an image of another color is transferred thereonto. Specifically, residual toner and charge on the photoreceptor drum 18 are removed by a cleaning portion 24 and a discharging portion (not shown), respectively, and thereafter, the photoreceptor drum 18 is charged again by the main charger 19. Then, a latent image corresponding to a magenta image formed on the photoreceptor drum 18 by a laser beam output for forming a latent image based on a PWM signal of a magenta color image data with respect to which the signal processing such as color conversion necessary for image processing has been performed is developed by an M developer unit 25. At this time, the M developer unit 25 is brought to a position opposite to the photoreceptor drum 18 in place of the Y developer unit 20, and develops the latent image with magenta toner.

In this embodiment, the Y developer unit 20 for the development of yellow, the M developer unit 25 for the development of magenta, a C developer unit 26 for the development of cyan and a BK developer unit 27 for the development of black are successively attached as shown in Fig. 11 in a vertical direction on a moving member 28 which moves upward and downward. The developer units are alternatively brought to a development position (the position opposite to the photoreceptor drum 18) according to the color of the color image data for forming the latent image by the laser beam output.

The image on the photoreceptor drum 18 developed with the magenta toner is transferred onto the sheet (the sheet where the yellow image has

been transferred) on the surface of the transfer drum 21. Cyan and black images are transferred onto the sheet in a similar manner, so that a color image is formed. The sheet where the color image has been formed is separated from the transfer drum 21, and the image is fixed at a fixing portion 29. Then, the sheet is discharged from the electrophotographic copying machine.

As described above, according to the present invention, in an image processing circuit which adds tracing information by means of yellow color image data, the tracing information can be read out by a scanner without a failure with a minimum influence on the image quality by the addition of the tracing information irrespective of the density area of the copy to which the information is added. As a result, the tracing performance is remarkably improved while the image quality does not greatly deteriorate. In many copying machines, to obtain a more beautiful reproduced image, the image data of a low tone portion is corrected to be low as shown in Fig. 10 by the half tone processing circuit 8 of Fig. 1. In the copying machines performing such a half tone processing, the low tone portion is printed so that its density is lower than the density where the tracing information is actually added. Consequently, it is difficult to detect the tracing information. In the present invention, however, since information of a rather high density is added to the low tone portion, the detection is sufficiently performed. Even in copying machines which do not perform the processing as shown in Fig. 10, it is difficult to obtain a sufficient density in a very low tone portion of a reproduced image. Therefore, by performing the processing as shown in Fig. 2 like in the present invention, the detection of the tracing information is ensured. While a case where the threshold value is set to 30 tones is described in this embodiment, the present invention is not limited thereto. A fine adjustment of the threshold value may be made by a manufacturer according to the condition of the copying machine.

Moreover, according to the present invention, in an image processing circuit which reproduces an image by adding tracing information, the tracing information is added in a manner such that the ratio of the area of the tracing information to the area of the reproduced image is fixed irrespective of the contents of the information, and position information is added for detecting the position on the reproduced image where the tracing information is added. As a result, the influence on the image quality by the addition of the tracing information is maintained uniform, and the tracing performance is largely improved.

Obviously, many modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood

that within the scope of the appended claims, the invention may be practiced other than as specifically described.

Claims

1. An image processing circuit which adds, by means of a yellow data, tracing information to a color image data including yellow, magenta and cyan components obtained by reading out of an original (12), wherein tracing information adding means is provided for varying a value of a yellow data to be added as tracing information according to a value of a read-out yellow component data of the original (12).
2. An image processing circuit according to claim 1, wherein said tracing information adding means adds the tracing information by replacing the read-out yellow component data with a yellow data of a predetermined value in a low density portion where the value of the read-out yellow component data is equal to or lower than a set threshold value (30), and wherein said information adding means adds tracing information by adding another predetermined value to the value of the read-out yellow component data in a high density portion where the value of the read-out yellow component data exceeds the set threshold value (30).
3. An image processing circuit comprising:
information adding means for adding information data for forgery tracing to a color image data; and
means for increasing a density of the added information data in a low-density area where a density of the color image data is equal to or below a predetermined value.
4. An image processing circuit according to claim 3, wherein the added information data is added by a yellow data.
5. An image processing circuit according to claim 4, wherein the added information data includes an apparatus number for specifying an image forming apparatus and an image formation date.
6. An image processing circuit according to claim 5, wherein the added information data further includes position information showing a position of addition.
7. An image processing circuit comprising:
a scanner (1) for reading out a color image;

a color converting circuit (2) which converts the color image read out by the scanner (1) into three primary colors of toner;

a color selector (4) which alternatively selects and successively outputs data or magenta, cyan and yellow components outputted by the color converting circuit (2);

a density adding circuit (5) which adds a density to the yellow component data from the color selector;

a bypass (31) for transmitting the data from the color selector (4) so as to bypass the density adding circuit (5), and

a selector (7) which makes a selection between an output of the density adding circuit (5) and an output from the bypass based on the opposition data from a memory (6) when the color selector (4) makes a selection so that the yellow component data is outputted from the color selector (4), said selector (7) selecting the output of the density adding circuit (5) for a portion corresponding to the position data, and selecting the output from the bypass (31) for a portion not corresponding to the position data.

8. An image processing circuit according to claim 7, wherein said density adding circuit (5) increases a density in a low-density area where a density of a color image data is equal to or below a predetermined value.
9. An image processing circuit which reproduces an image while adding tracing information to a color image data obtained through reading-out, wherein a tracing information adding means is provided for adding tracing information in a manner such that a ratio of an area of the tracing information to an area of a reproduced image is fixed irrespective of contents of the tracing information.
10. An image processing circuit according to claim 9, wherein said tracing information adding means adds the tracing information in a form of an $m \times n$ matrix by adding a yellow color image data and specifies contents of the tracing information based on a position within the $m \times n$ matrix where the yellow color image data is added.
11. An image processing circuit which reproduces an image while adding tracing information to a color image data obtained through reading-out, wherein a tracing information adding means is provided for adding, together with tracing information, position information for detecting a position on a reproduced image where the

tracing information is added.

12. An image processing circuit according to claim 11, wherein said tracing information adding means adds the tracing information in a form of an $m \times n$ matrix and adds the position information to a row or a column along a periphery of the matrix or to both of the row and the column.

5

10

15

20

25

30

35

40

45

50

55

7

Fig.1

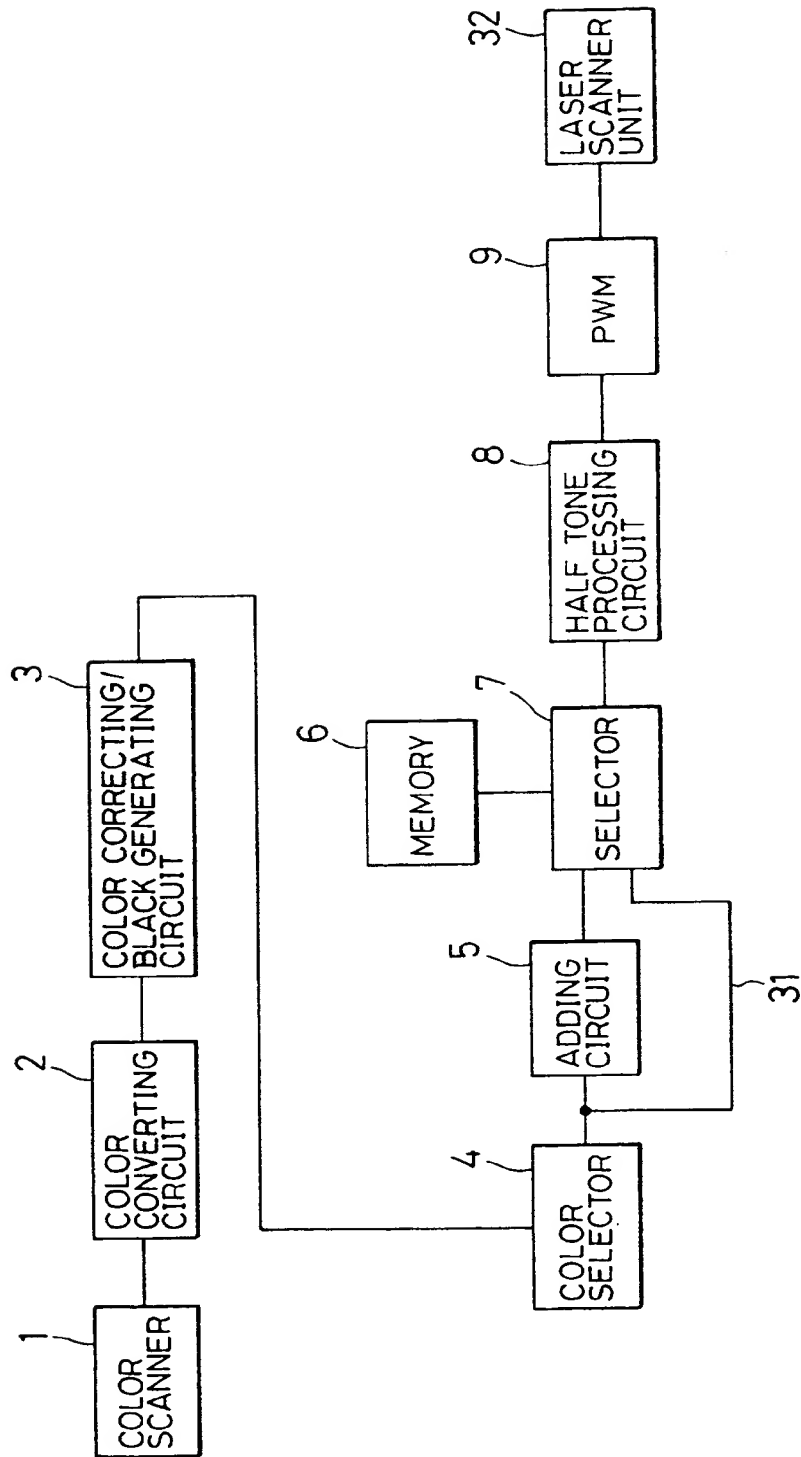


Fig. 2

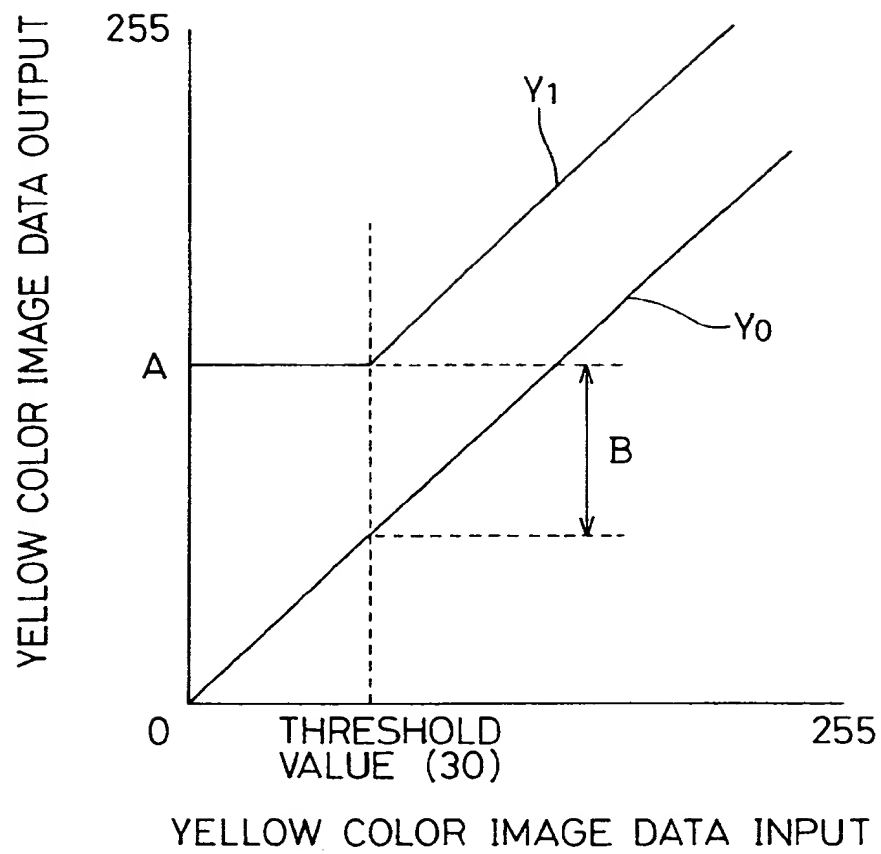


Fig.3

	0	1	2	...	n
0	0	1	0	...	1
1	1	0	0	...	0
2	0	0	0	...	0
...
...
...
m	0	0	1	...	0

Fig.4

	0	1	2	...	n
0	1	1	1	...	1
1	1	0	0	...	0
2	1	1	0	...	0
...
...
...
m	1	0	1	...	1

Fig.5

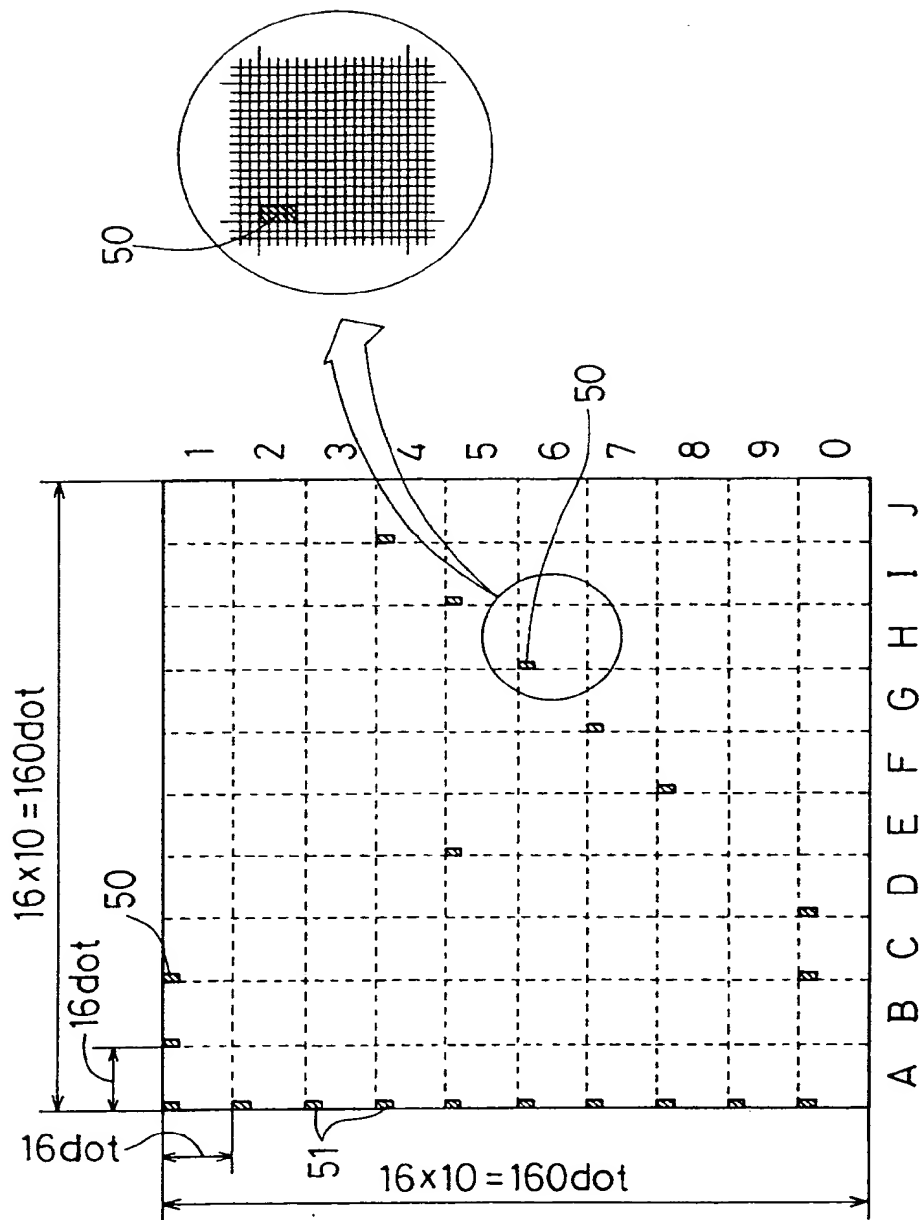


Fig.6

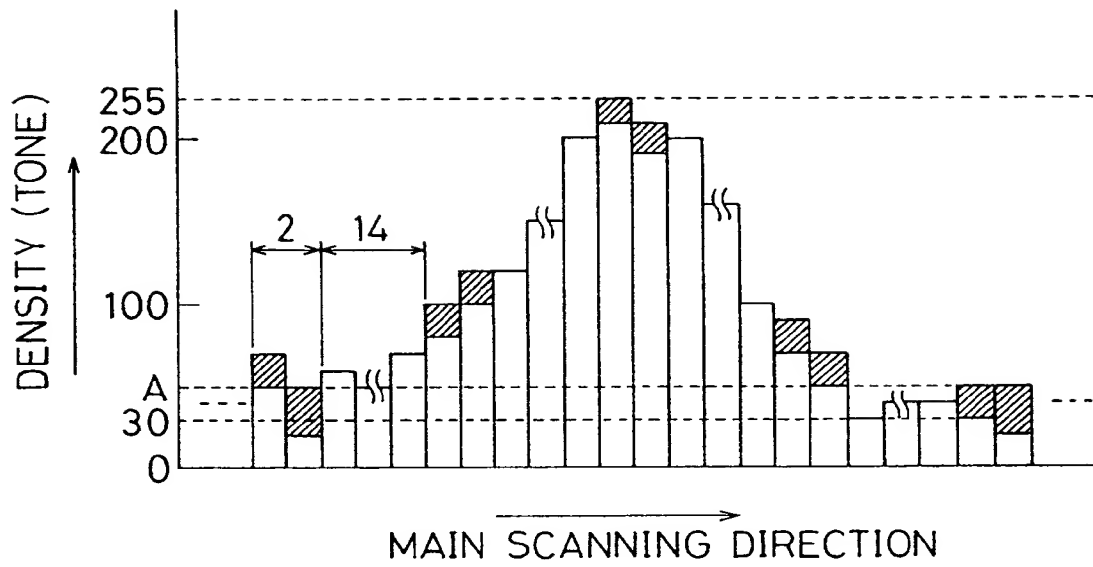


Fig.7

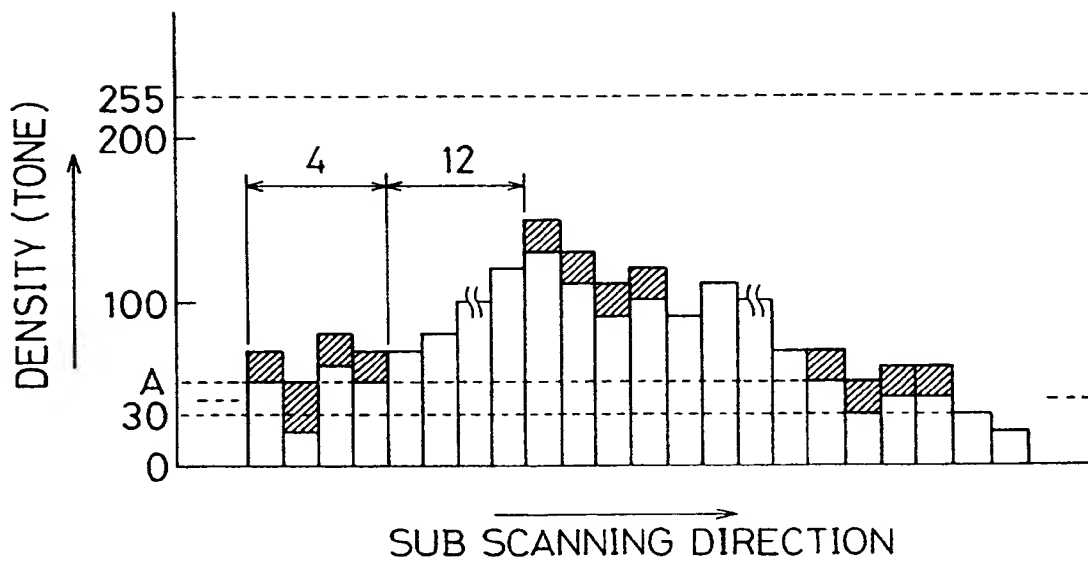


Fig.8

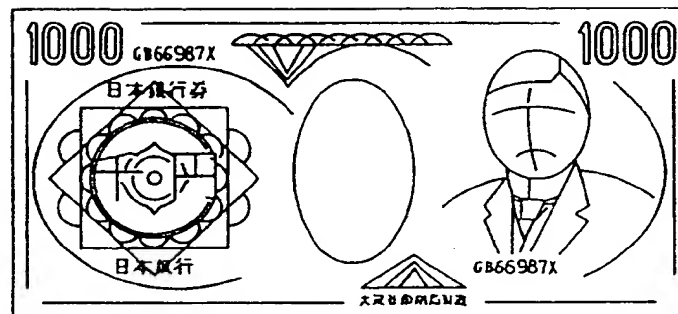


Fig.9

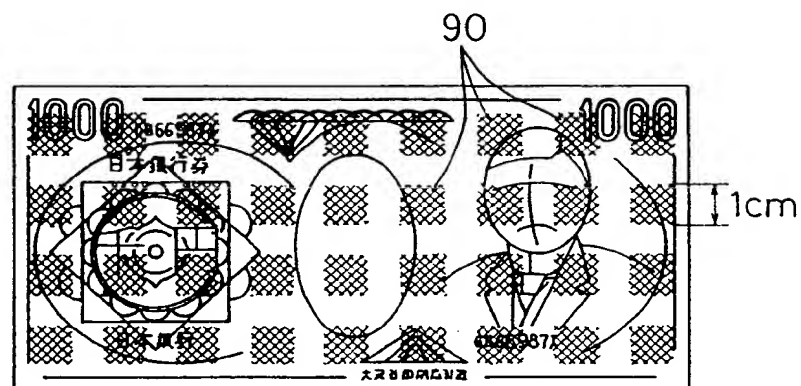


Fig.10


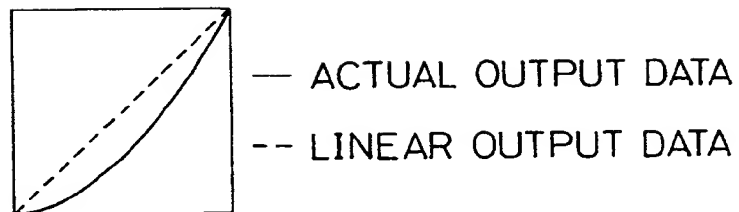


FIG.11



THIS PAGE BLANK (USPTO)

(19)

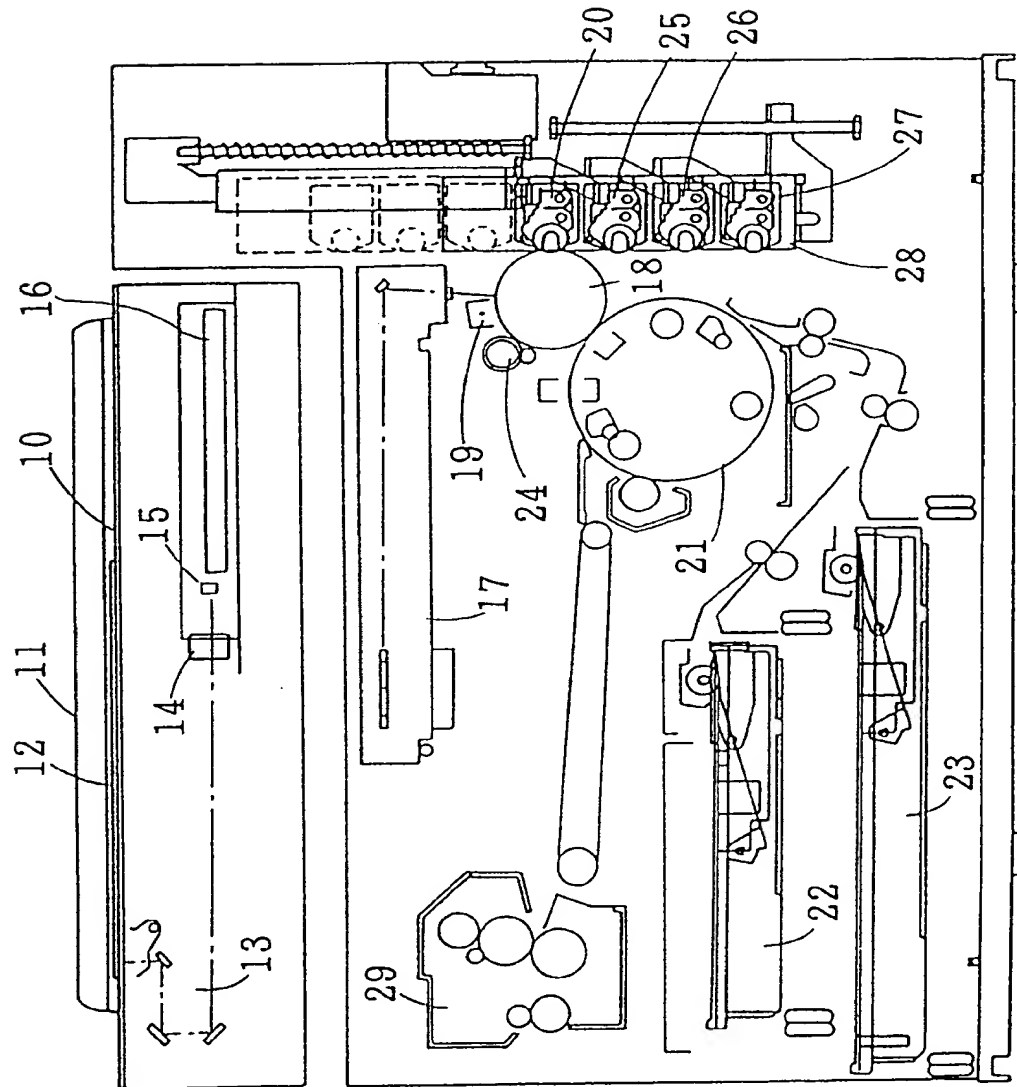

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 655 853 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
24.07.1996 Bulletin 1996/30

(51) Int. Cl.⁶: **H04N 1/00**, H04N 1/387

(43) Date of publication A2:
31.05.1995 Bulletin 1995/22

(21) Application number: **94118496.2**

(22) Date of filing: **24.11.1994**

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: **30.11.1993 JP 299651/93**
01.12.1993 JP 301556/93

(71) Applicant: **MITA INDUSTRIAL CO. LTD.**
Osaka-shi Osaka 540 (JP)

(72) Inventors:

- **Miyazaki, Tadashi,**
c/o Mita Industrial Co., Ltd.
Osaka-shi, Osaka 540 (JP)
- **Kumamoto, Hidechika,**
c/o Mita Industrial Co., Ltd.
Osaka-shi, Osaka 540 (JP)


(74) Representative: **Beetz & Partner**
Patentanwälte
Steinsdorfstrasse 10
80538 München (DE)

(54) Image processing circuit

(57) An image processing circuit (16) which adds, by means of a yellow color image data, forgery tracing information to yellow, magenta and cyan color image data obtained by reading out of an original (12). A tracing information adder replaces the read-out yellow color image data with a yellow color image of a higher density in a low-density area where the density of the read-out

yellow color image data is equal to or below a set threshold value (30). In a high-density area where the density of the read-out yellow color image data exceeds the set threshold value (30), the tracing information is added by adding a predetermined value B to the read-out yellow color image data.

Fig.1

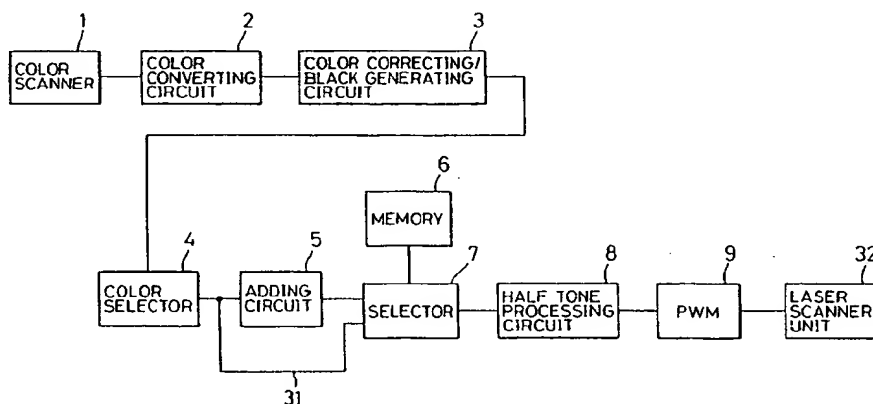**EP 0 655 853 A3**



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 94 11 8496

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	DE-A-28 05 146 (BURROUGHS) * claims 1,5,6 *	1-4,9	H04N1/00 H04N1/387
A	EP-A-0 535 891 (CANON) * abstract; figures 1,3,11,12,16 * * figures 17,18,20,22 *	1,3-5,7	
A	EP-A-0 506 332 (CANON) * abstract; figures 1,9,10,12,16 * * figures 19,25,28-30 *	1,3-5,7	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H04N
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 23 May 1996	Examiner Kassow, H
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.92 (P04C01)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)